

Diplexer for the 0 - 240 MHz and 330 - 1300 MHz  
Ranges

DESCRIPTION

- Diplexer for combining or splitting the two ranges 0 - 240 MHz and 330 - 1300 MHz.
- Excellent wide-band coverage – usable for a lot of applications.
- Extremely small dimensions.
- FME-connections on all terminals.
- Two mounting options available:
  - Dual-adhesive pad for quick installation.
  - Mounting brackets with ø3.2 mm holes for screw mounting.




SPECIFICATIONS

| Electrical                  |  |
|-----------------------------|--|
| Model                       | DIPX 240/330-...                                     |
| Frequency                   | Low port : 0 - 240 MHz<br>High port : 330 - 1300 MHz |
| Max. Input Power            | 35 W   |
| Impedance                   | 50 Ω   |
| Isolation                   | Low to high port: 40 dB                              |
| Mechanical                  |  |
| Connection(s)               | Low : FME<br>High : FME<br>Antenna: FME              |
| Dimensions                  | 50 x 21 x 50 mm /<br>1.97 x 0.83 x 1.97 in.          |
| Weight                      | Approx. 0.062 kg / 0.14 lb.                          |
| Environmental               |  |
| Operating temperature range | -30 °C to +70 °C                                     |
| Ingress Protection          | IP41   |

ORDERING

| Model          | Product No. | Description       |
|----------------|-------------|-------------------|
| DIPX 240/330   | 200002654   | Dual-adhesive pad |
| DIPX 240/330-M | 200002655   | Mounting brackets |


TYPICAL RESPONSE CURVE

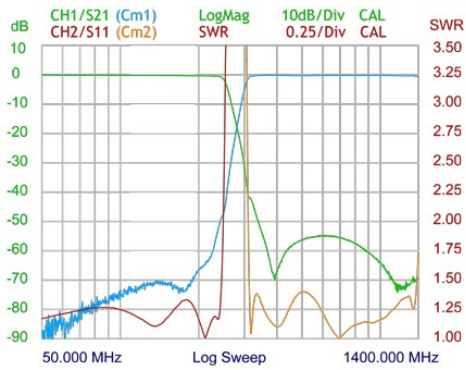

MOUNTING DETAILS

Two-adhesive pad for quick installation.

Mounting bracket with ø3.2 mm holes for screw mounting.

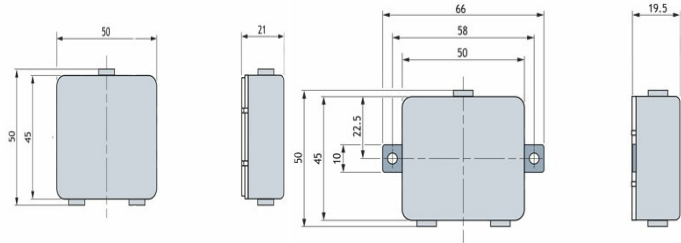

All dimensions are given in mm.

INSTALLATION

The DIPX 240/330 makes it possible to use only one antenna for the operation of two transceivers (one in each range). See the figure below. The antenna must be a dual-frequency antenna, e.i. it must be resonant on the actual frequencies in the two bands.

The transceivers may be used independently and will have no degrading influence on each other. Typically, the diplexer is installed next to the transceivers and only one cable is used between the diplexer and the antenna. The diplexer is suitable both for base station and mobile use.

The main tasks of the diplexer are to protect the individual receiver input from being destroyed by the transceiver in the contrary band and to ensure a lowloss path between the transceiver and the antenna which is not loaded by the other branch. The diplexer can be operated together with any set of transceivers operating within the 0 - 240 MHz and 330 - 1300 MHz frequency bands.

Dual-frequency antennas are available for both mobile and base station applications.

