

Goose neck hands-Free Microphone

DESCRIPTION

- Goose neck microphone for hands-free operation in vehicles.
- Available with 300 mm or 500 mm goose neck.
- Mounting on steering column, dash board, window frame etc.
- Attractive design.
- Uni-directional pattern.
- High-sensitivity electret cartridge.
- Voltage supply 9 - 15 V DC when connected as shown in the diagram below.
- Supplied with 4 m cable (incl. Goose neck) terminated with a 3.5 mm plug.
- Wind cap.




SPECIFICATIONS

Electrical	
Model	DM 6600 F-...
Type	Goose neck microphone
Pattern Type	Uni-directional
Impedance	1 k Ω
Frequency Response	Shown in diagram below
Power Supply	Biased from 9 - 15 V DC power supply via bias resistor. See diagram
Current Consumption	Approx. 0.5 mA
Sensitivity	-44 dB \pm 3 dB at 1 kHz rel. 1 V/Pa
Mechanical	
Cartridge Type	Electret
Materials	Brass, epoxy laquered. Impact-proof ABS
Cable	4 m (incl. Goose neck) 1 wire with shield with 3.5 mm plug
Colour	Black
Dimensions	DM 6600 F: 350 x 14 mm / 13.7 x 0.5 in. DM 6600 F-500: 560 x 14 mm / 22.0 x 0.5 in.
Weight	DM 6600 F: Approx. 100 g / 0.22 lb. DM 6600 F-500: Approx. 125 g / 0.27 lb.
Environmental	
Operating temperature range	-25 $^{\circ}$ C to +55 $^{\circ}$ C
Storage Temperature Range	-40 $^{\circ}$ C to +55 $^{\circ}$ C

ORDERING

Model	Product No.	Description
DM 6600 F	270000038	NECK LENGTH: 300 mm
DM 6600 F-500	270000113 (MOQ: 500 pcs.)	NECK LENGTH: 500 mm

TYPICAL FREQUENCY RESPONSE

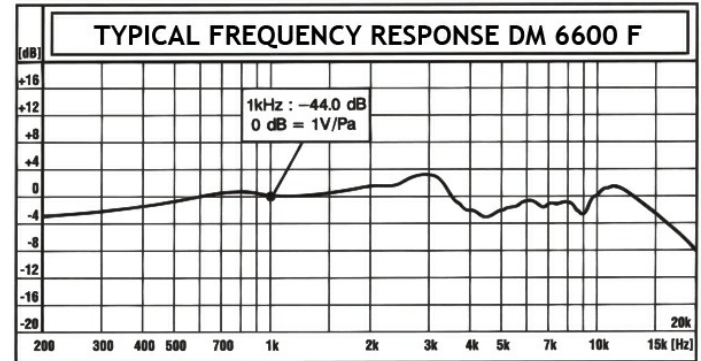

ELECTRICAL DIAGRAM

