
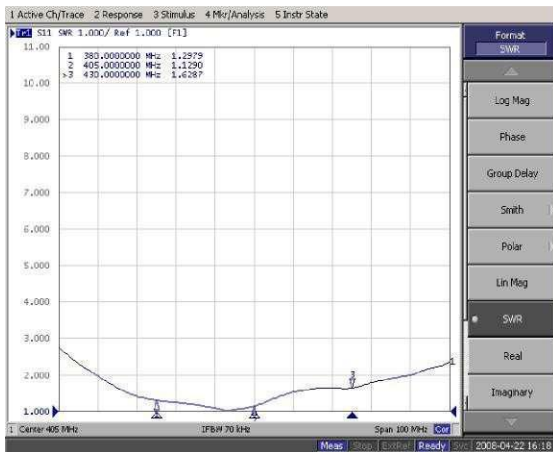


SPECIFICATION

Material	Nylon / FR4
Colour	Black
Net Weight	Approx. 75g
Dimensions	Ø260 x 55mm
Build-in Depth	Approx. 25mm
Temperature	-30°C – +80°C
Mounting	Glass
Mounting Type	Bolt-On Type with Double Self-Adhesive Tape for Effective Sealing

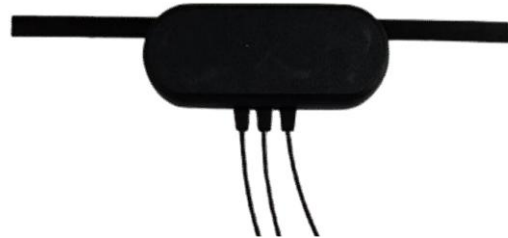

TECHNICAL DATA UHF

Antenna Type	Heavy Duty and Ultra Small Omni-Directional UHF ¼ Lambda Patch Antenna
Frequency MHz	380 ÷ 430
Impedance	Nom. 50 Ω
Max. Power	20 Watt
V.S.W.R.	<2.0
Gain (dBi)	2.14
Cable	Approx. 1,5m RG174ER118
Connector	SMA (m)

TECHNICAL DATA LTE-5G

Antenna Type	Heavy Duty Omni-Directional LTE-5G Patch Antenna
Frequency MHz	617-960 / 1700-2700 / 3000-7200
Impedance	Nom. 50 Ω
Max. Power	20 Watt
V.S.W.R.	1.5 ÷ 6
Gain (dBi)	2 ÷ 4
Cable	Approx. 1,5m RG174ER118
Connector	SMA (m), Red

TECHNICAL DATA GPS

Antenna Type	Heavy Duty Active GPS/GLONASS/GALILEO Patch Antenna
Frequency MHz	1580
Impedance	±28
Max. Power	Nom. 50 Ω
V.S.W.R.	<2.0
Polarisation	RHC (Right Hand Circular)
Gain (LNA)	2.7 ÷ 5.1 V
Current	13 ± 2 mA 3,0 V
Absorption	26 ± 3 at 3,0 V
Gain Amplifier	
Gain patch antenna	1 dB
Noise Fig.	<1.5 dB
Cable	Approx. 1,5m RG174ER118
Connector	SMA (m), Blue

